







Radiator Name: ALINA


This product must be fitted only by a fully qualified installer

Description	Illustration	Qty	Description	Illustration
Radiator		1	Fixings choose the appropriate fixing for the wall material if required	
Bracket	 or 	4	PTFE tape	
Fixing Screw		4	Electric drill	
Spacer		4 or 8	Masonry drill bit appropriate to the fixings	
Air Vent		1	Adjustable spanner	
End Plug		1	Radiator valve Hex Key	
			Flat head and Philips head screw drivers	
			1 Lock shield valve and 1 Gate or Thermostatic valve	
			Spirit level	
			Measuring tape	


GENERAL RECOMMENDATION

Before fitting the radiator it is necessary to wash out the heating system to remove any existing mud, scale, work residues, traces of flux, oil etc.... When the system water PH is outside the 5.5-8.5 range and /or when the dissolved is above 0.1mg/litre, it is always needed to protect the heating system components (the radiator is one of these) with a proper chemical treatment compatible with all parts in contact with water (Silicon rubber too). In order to fit the radiator to the wall, it is necessary to choose the proper fixings for the wall material. If the system water exceeds 50 centigrad degree, please install a warning mark near the radiator to avoid any accidental scalding. Clean the radiator surface only with a soft cloth to avoid scratching the finish and do not use chemical agents during cleaning operations. It is prohibited to climb on the radiator. Maximum working temperature: 95 centigrad degree. Maximum working pressure: 4 bar.

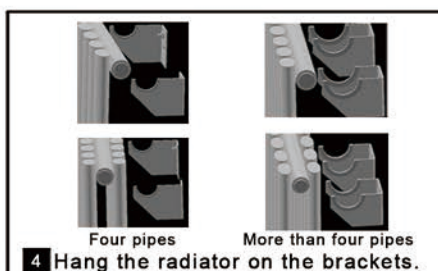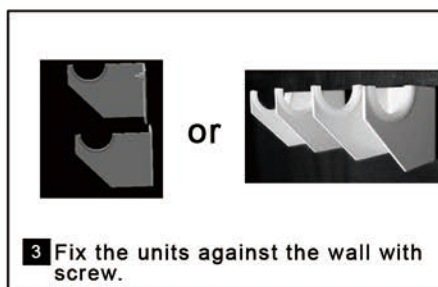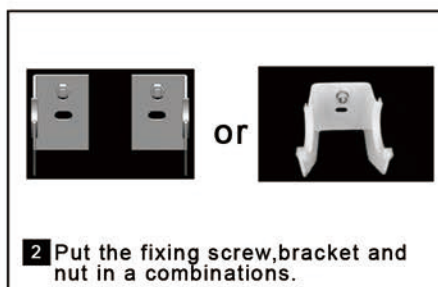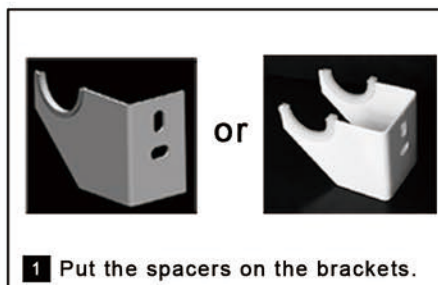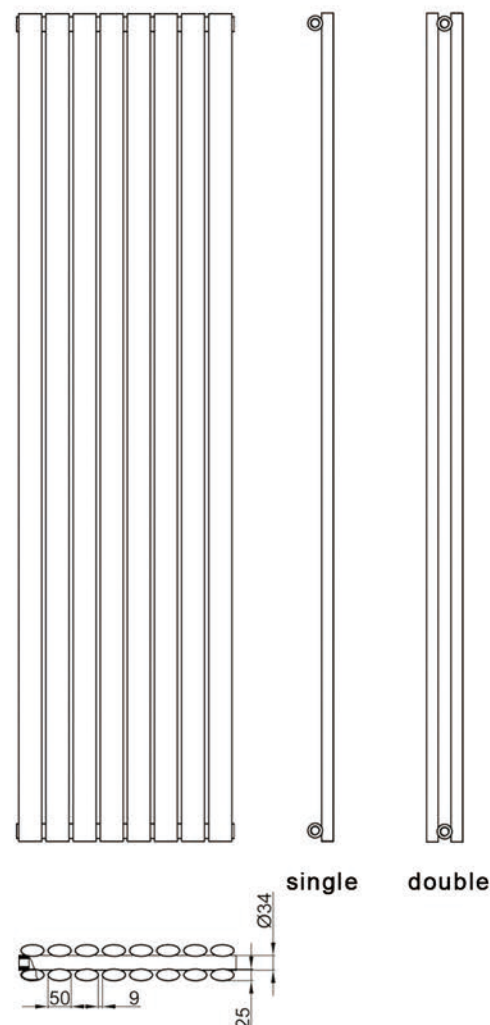





Front View

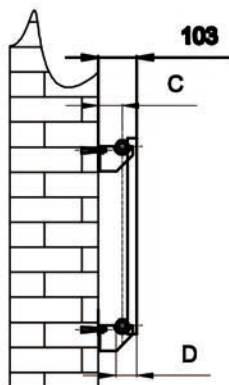

Side View



Back View

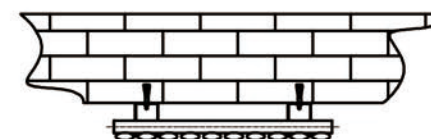

Top view


SUPPLIED INSTALLATION ACCESSORIES

→ X4 — X8 • X2


⌋ X4 • X1 • X1

-Vertical Mounting
-Optional Color Selection
-Max Operational Pressure:6Bar
-Inlet/Outlet:½"Female Pipe Thread
-All Dimensions are in mm


Product Name	pipe number	Height	Width	Thickndss	hanger Axes Horizontal	hanger Axes vertical	Wall to pipe center distance	Empty Weight	Water volume
	-	H	W	D	S	G	C	-	-
		mm	mm	mm	mm	mm	mm	kg	l
ALINA 550X590	10	550	590	56	413	485	63	11.4	5.54
ALINA 550X826	14	550	826	56	649	485	63	15.3	7.75
ALINA 550X1003	17	550	1003	56	826	485	63	18.1	9.41
ALINA 550X1180	20	550	1180	56	1003	485	63	20	11.07




Front View

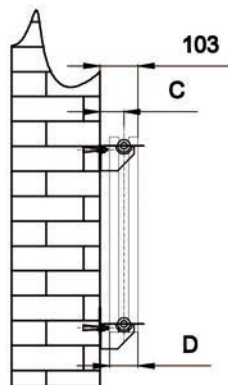

Side View



Back View

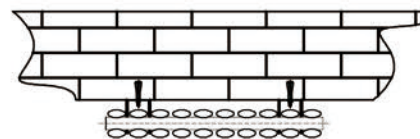

Top view


SUPPLIED INSTALLATION ACCESSORIES

— X4 — X8 • X2


• X4 • X1 • X1

-Vertical Mounting
-Optional Color Selection
-Max Operational Pressure:8Bar
-Inlet/Outlet:½"Female Pipe Thread
-All Dimensions are in mm


Product Name	pipe number	Height	Width	Thickndess	hanger Axes Horizontal	hanger Axes vertical	Wall to pipe center distance	Empty Weight	Water volume
		H	W	D	S	G	C	-	-
		mm	mm	mm	mm	mm	mm	kg	l
ALINA 550X590DBL	20	550	590	78	413	485	63	18.9	10
ALINA 550X826DBL	28	550	826	78	649	485	63	27.7	14
ALINA 550X1003DBL	34	550	1003	78	826	485	63	35.5	17
ALINA 550X1180DBL	40	550	1180	78	1003	485	63	39.4	20

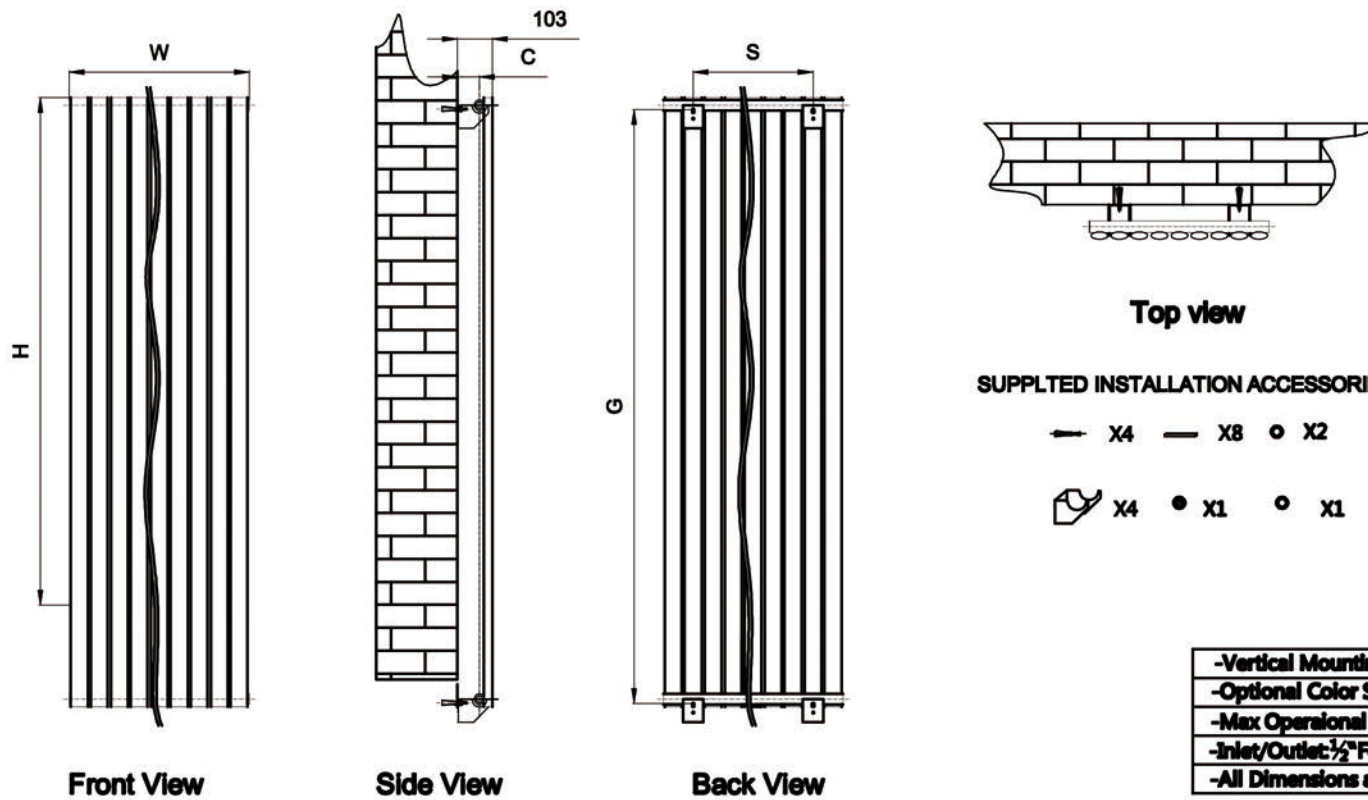


Product Name	pipe number	Height	Width	Thickness	hanger Axes Horizontal	hanger Axes vertical	Wall to pipe center distance	Empty Weight	Water volume
	-	H mm	W mm	D mm	S mm	G mm	C mm	- kg	- l
ALINA 1800X354	6	1800	354	56	177	1755	63	17.2	9.40
ALINA 1800X413	7	1800	413	56	236	1755	63	21.7	10.98
ALINA 1800X531	9	1800	531	56	354	1755	63	25.4	14.10

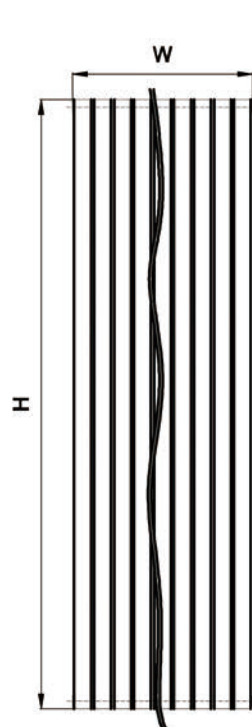


Front View

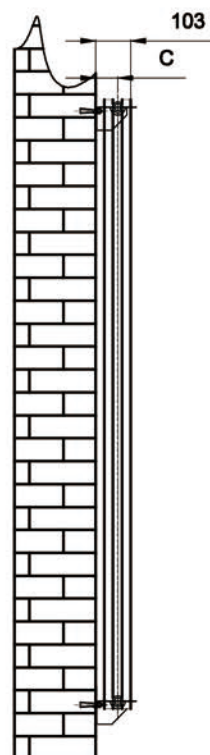

Side View

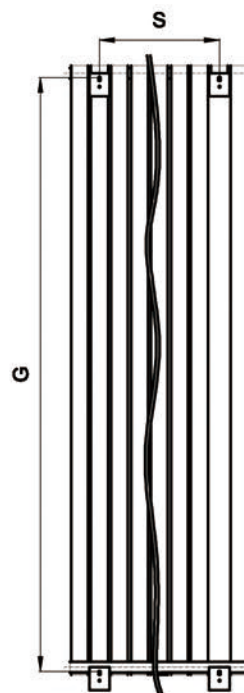

Back View

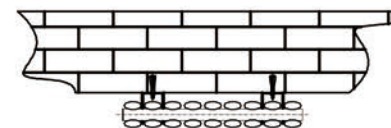

Top view

SUPPLIED INSTALLATION ACCESSORIES

← X4 — X8 ○ X2

⌋ X4 ● X1 ○ X1

- Vertical Mounting
- Optional Color Selection
- Max Operational Pressure:6Bar
- Inlet/Outlet:1/2"Female Pipe Thread
- All Dimensions are in mm

Product Name	pipe number	Height	Width	Thickndss	hanger Axes Horizontal	hanger Axes vertical	Wall to pipe center distance	Empty Weight	Water volume
	-	H	W	D	S	G	C	-	-
		mm	mm	mm	mm	mm	mm	kg	l
ALINA 1800X354DBL	12	1800	354	56	177	1755	63	32.4	18.20
ALINA 1800X413DBL	14	1800	413	56	236	1755	63	38.6	21.20
ALINA 1800X531DBL	18	1800	531	56	354	1755	63	49.5	27.20